

**Bar Linear Removable Core Registers**



**Not suitable for floor use**


**DABLDR**

- Removable core held in place with clips
- Fully extruded aluminum construction for a stylish appearance
- Fixed blades designed for long straight air throw
- Built-in Opposed Blade Damper with sliding operator
- Sections joined together for continuous appearance. When longer than 84", aligning pins are provided.
- Available on 1/2+increments as standard
- Custom sizes available but extra charge may apply
- Durable powdercoat painted finish

**HOW TO ORDER**  
**DABLDR\_ - 00 - D 30 x 4 COLOR**

Grid core	-G	Blade	Width &	White
No flange	-N	-00,-01	Height	Silver
		-15,-30		Mill
		-82,-84	Mounting	Brown
			A,B,C or D	

**Do not leave space if option is not required**

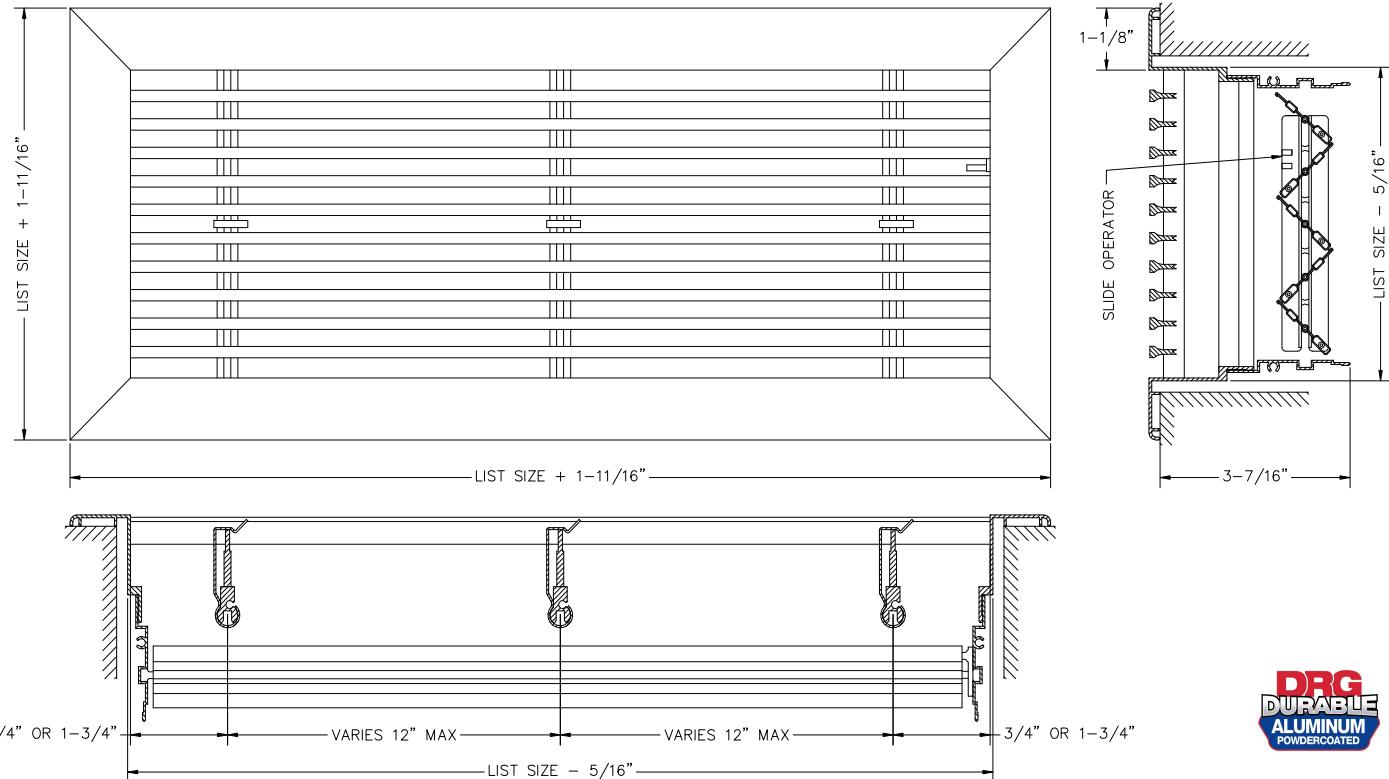

**DRG**  
**DURABLE**  
**ALUMINUM**  
**POWDERCOATED**


DESCRIPTION	DABLDR
FACE BLADES	Horizontal Fixed
REAR BLADES	n/a
DAMPER	Opposed Blade
MATERIAL	Aluminum
COLOR	White/Silver/Brown/Mill

JOB NAME:	_____
LOCATION:	_____
ARCHITECT:	_____
ENGINEER:	_____
CONTRACTOR:	_____

**Bar Linear Blade Options**


**-00-**

$0^\circ \frac{13}{64}$ +blades on  $\frac{1}{2}$ +centers

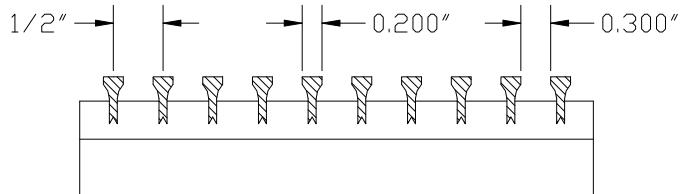


**-01-**

$0^\circ \frac{1}{4}$ +blades on  $\frac{1}{2}$ +centers

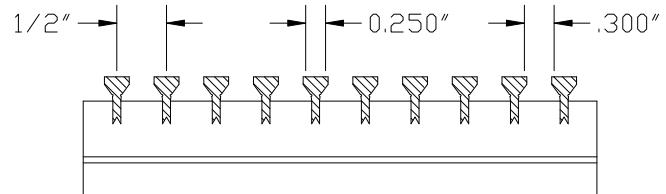


**-15-**

$15^\circ \frac{13}{64}$ +blades on  $\frac{1}{2}$ +centers

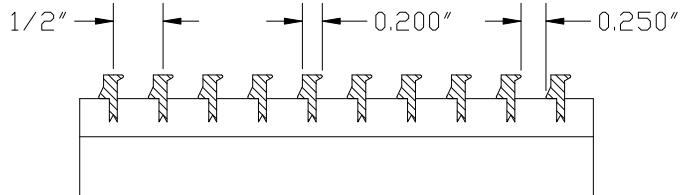


**-30-**

$30^\circ \frac{13}{64}$ +blades on  $\frac{1}{2}$ +centers

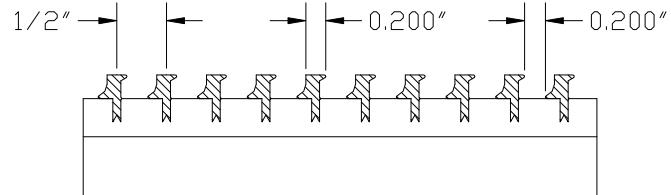


**-82-**

$0^\circ \frac{1}{8}$ +blades on  $\frac{1}{2}$ +centers

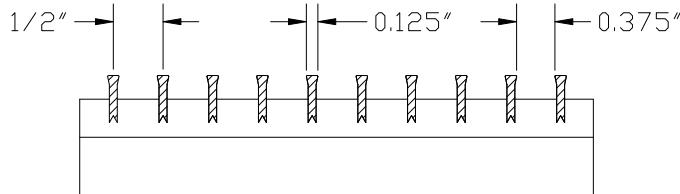

**-84-**

$0^\circ \frac{1}{8}$ +blades on  $\frac{1}{4}$ +centers

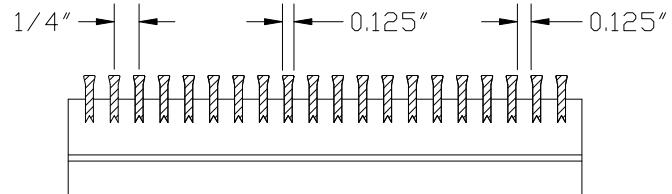


- Additional charges apply for the -84 core option

## Bar Linear Mounting Options

### -A

#### SCREWS


Color matched screws with counter-sunk screwholes.  
Suitable for ceiling, wall, sill or floor installation.

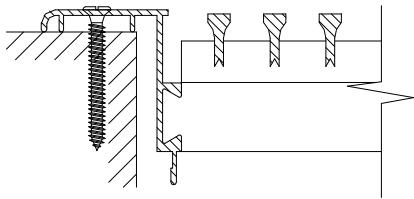

### -B

#### SPRING CLIPS


Clips behind the flange keep grille snug in opening and are not visible from the face.  
Only for floor and sill applications.  
**NOT suitable for wall or ceiling use.**

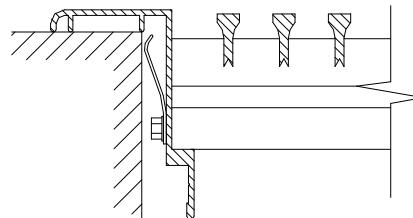

### -C

#### CONCEALED BRACKETS


Grille gets fastened to duct-mounted brackets that are concealed behind the blades.  
Suitable for ceiling, wall, sill or floor installation.

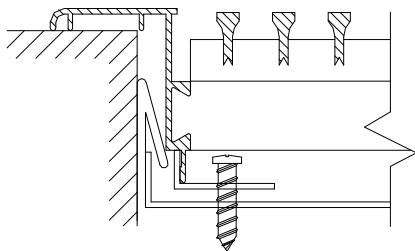

### -D

#### SIDEWALL SCREWHOLES

Screw holes drilled at 45° on inner flange.  
Only available with **-R Removable core**.  
(Removable option not available for floor)  
Suitable for ceiling, wall or sill installation.

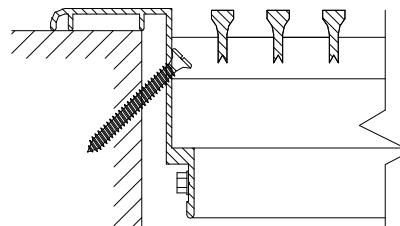

### -TB

#### NO MOUNTING OPTION

Suitable for T-Bar lay-in ceiling & custom applications.  
Account for the flange by ordering 2+under the T-Bar size.  
i.e.: a 22+x 10+grille will have a 23-11/16+x 11-11/16+OD  
and will fit a standard 2 ft x 1ft T-Bar opening

